



AS/AC

REPLACEABLE BLADDER TANKS FOR SANITARY WATER (2 - 25 lt.)

2 - 25 litres



CE Approval



For drinking water




For booster pumping systems




Shock suppressor

AC-2


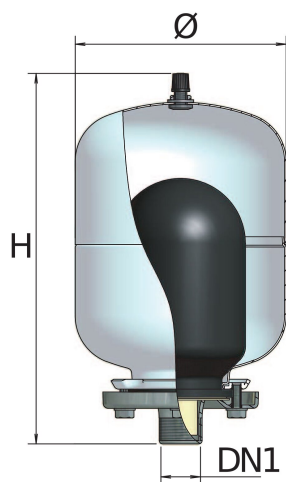


AC 5 - 25; AFV 24

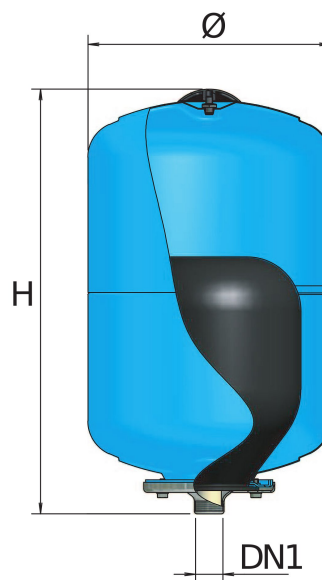


AC 25 GPM

AS 25

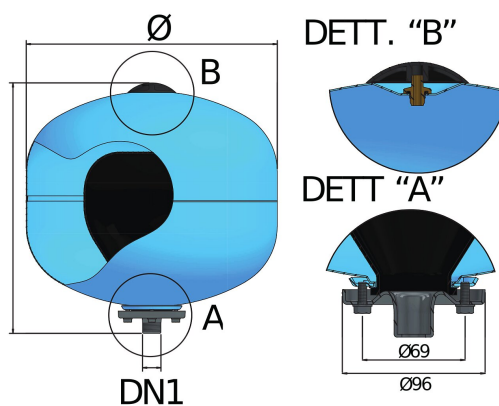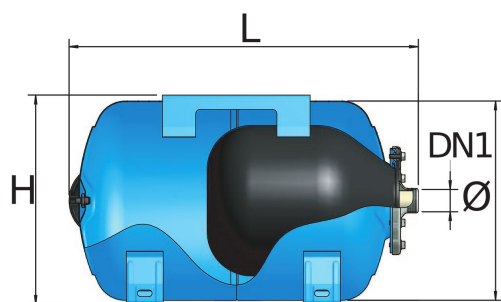

AC 20 PN25

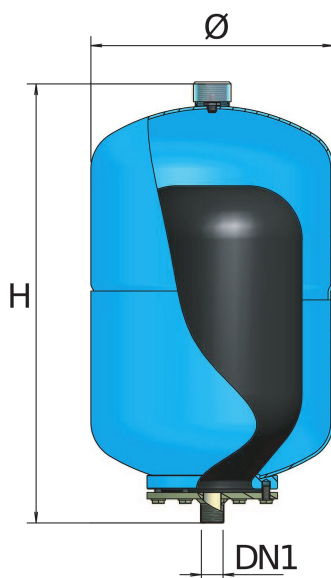

Keyword

DN	Description
DN1	Water connection

Model	Code	Capacity L	Tmin	Tmax	P _{PRE}	P _{MAX}	H mm	L mm	Ø mm	Packing mm	Dim. plt mm
AC-2 *	A012J07	2	-10°C	99°C	2.5	8	230		130	155x155x245	1000x1500x1000
AC 5 *	A012J11	5	-10°C	99°C	2.5	8	225		205	215x215x250	
AC 8 CE *	A012J16	8	-10°C	99°C	2.5	8	290		205	215x215x335	
AC 12 CE *	A012J20	12	-10°C	99°C	2.5	8	305		270	280x280x315	
AC 18 CE *	A012J24	18	-10°C	99°C	2.5	8	400		270	280x280x435	
AC 25 CE *	A012J27	24	-10°C	99°C	2.5	8	440		270	280x280x470	
AC 25 GPM CE *	A022J27	24	-10°C	99°C	2.5	8	285	440	270	300x300x470	
AS 25 FP *	A002J27 F0001	24	-10°C	99°C	2.5	8	355		360	370x370x365	
AC 20 PN25 CE *	A012T25	20	-10°C	50°C	5	25	505		270	280x280x525	
AFV 24/16 *	A032R27	24	-10°C	99°C	2.5	16	450		270	280x280x470	

* Exempt from CE marking

Connection sizes

MODEL	DN1
AC-2	G3/4"
AC 5	G3/4"
AC 8 CE	G3/4"
AC 12 CE	G3/4"
AC 18 CE	G1"
AC 25 CE	G1"
AC 25 GPM CE	G1"
AS 25 FP	G1"
AC 20 PN25 CE	G3/4"
AFV 24/16	1"NPT

Reference standards

Declaration of conformity to essential safety requirements specified in 2014/68/UE Directive. (The 2 and 5 litres models are exempt from CE marking).

Warranty: 2 years

Materials

Cylinder in carbon steel. External epoxy blue paint treatment (RAL 5015).

(Model AC-2: white)

Replaceable bladder in EPDM rubber (model AC-2: replaceable bladder in butyl) suitable for contact with potable water.

These articles are suitable for operation with water or with water-glycol mixture up to 50% glycol content